


Dayton Condensate Drain Line Cleaner

This tool is designed to clear a condensate line with a blast of pressurized CO₂.

INSTRUCTIONS

1. Unscrew the cylinder enclosure from the unit's head and insert the large end of a CO₂ cylinder into the enclosure with the narrow end up.
2. While making sure the red safety lever is in the up position, screw the cylinder enclosure back onto the unit head of the drain line cleaner. Firmly hand tighten the cylinder enclosure until it is fully tightened to prevent any gas leakage, but do not overtighten. If the CO₂ cylinder has screw threads, then screw the CO₂ cylinder only into the unit's head by turning it clockwise until it is hand tight. Then screw the cylinder enclosure to the unit head. Do not use a tool to tighten either the cylinder or the cylinder enclosure.
3. To release the trigger, hold the cylinder enclosure and pull the red safety lever down until you hear a snap.
4. Firmly and squarely push the black rubber cone into the end of the condensate drain line. Minimum drain line size is 3/8" (10 mm) diameter to a maximize drain line size of 3/4" diameter (20 mm).
5. While pressing the rubber cone into the drain line opening, pull the trigger until the line is cleared of obstruction.
6. Be sure to push the safety lever back up until you hear a snap to be sure the trigger is not depressed accidentally.

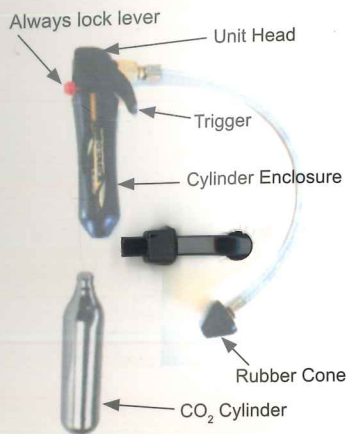

SAFETY WARNINGS

⚠ DANGER The CO₂ gas cylinder is under very high pressure. Do not remove the cylinder enclosure until the CO₂ gas cartridge is completely empty and no more gas exits when the trigger is depressed.

Do not place CO₂ cylinders in direct sunlight or hot environments.

To avoid injury do not point the rubber cone and discharge toward your face, hand or body, or at other people.

To avoid injury do not place the rubber cone into your hand to check for gas and discharge.

When positioning the rubber cone for clearing drain obstructions, use a towel or other insulating material to firmly hold the device in location to prevent injury.

To avoid eye injury always wear safety glasses when operating the tool condensate drain line cleaner.

Keep out of reach of children.

10569